



LED




Стандартно / Standard

Приложение: Административни зони, офиси, фабрики, магазини, спортни зали, ресторанти, коридори, стълбища, училища, болници, авто- и жп гари, складове, гаражи, логистични терминали, лаборатории и др.
 Корпус: Поликарбонат / ABS
 Разсейвател: Поликарбонат
 Монтаж: Стенен монтаж / директно на таван / вграждане в качен таван
 Варианти: Ръчен тест(ST) / автотест(AT) / адресируем(DATA) / централна батерия(CB) / студоустойчив "-15° до -40°C"



Application: Administrative areas, offices, factories, shops, sport halls, restaurants, corridors, staircases, schools, hospitals, bus and railway stations, warehouses, garages, transport terminals, laboratories etc.
 Body: Polycarbonate / ABS
 Diffuser: Polycarbonate
 System of fastening: Wall / surface / recessed
 Versions: Manual test(ST) / autotest(AT) / monitoring(DATA) / central battery(CB) / cold "-15° до -40°C"

Размери / Dimensions

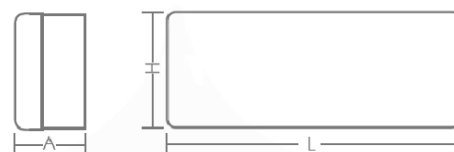

Варианти / Versions

Модел Model	Брой диоди LEDs	Време за разряд Emergency mode duration [H]	Размери Dimensions LxAxH [mm]	Светлинен поток Luminous flux M/NM [lm]	Входно напрежение Power Supply [V]
Ontec S M1 ST	7	1 / 3	269x140x40	193/128	220-230
Ontec S M2 ST	14	1 / 3	269x140x40	235/218	220-230
Ontec S M1 AT	7	1 / 3	269x140x40	193/128	220-230
Ontec S M2 AT	14	1 / 3	269x140x40	235/218	220-230
Ontec S M1 DATA	7	1 / 3	269x140x40	193/128	220-230
Ontec S M2 DATA	14	1 / 3	269x140x40	235/218	220-230
Ontec S M1 CB	7	-	269x140x40	193/193	220-230
Ontec S M2 CB	14	-	269x140x40	235/235	220-230

M - maintained; NM - non-maintained